

» Sleeve sensor Pt100

- With FEP (silicone) or PTFE (Teflon) cable
- Water tight design, shielded, 3-wire
- Range of applications: FEP up to +180°C | PTFE up to +250°C




Standard cable length: 2 m, 5 m, 7 m
Special cable: ab 1 m
Please specify standard/special lengths when you order!

Standard dimensions sensor tube:
L 100 mm x 6 mm Ø
L 80 mm x 6 mm Ø
L 60 mm x 6 mm Ø
Length & diameter of the sensor tube vary also. Please specify sensor dimensions when you order!

» Surface sensor Pt100

- With FEP (silicone) or PTFE (Teflon) cable
- Water tight design, shielded, 3-wire
- Range of applications: FEP up to +180°C | PTFE up to +250°C

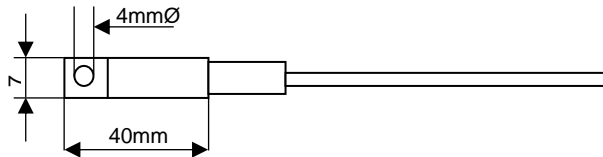


Standard cable length: 2 m, 5 m, 7 m
Special cable: ab 1 m
Please specify standard/special lengths when you order!

Standard dimensions sensor part:
7 x 7 x 40 mm, hole 4 mm Ø
Dimensions of the sensor part vary also. Please specify sensor dimensions when you order!

» Screw-in sensor Pt100

- With FEP (silicone) or PTFE (Teflon) cable
- Water tight design, shielded, 3-wire
- Range of applications: FEP up to +180°C | PTFE up to +250°C

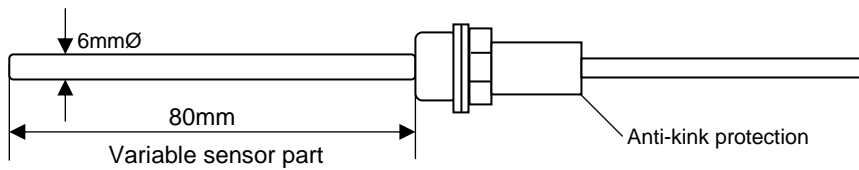


Standard cable length: 2 m, 5 m, 7 m
Special cable: ab 1 m
Please specify standard/special lengths when you order!

Standard dimensions sensor part:
R ¼ thread, sensor part 80mm x 6mmØ
Length, diameter and thread of the sensor part vary also. Please specify sensor dimensions when you order!

» Piercing sensor Pt100


- With FEP (silicone) handle + cable
- Water tight design, shielded, 3-wire
- Range of applications: FEP up to +180°C

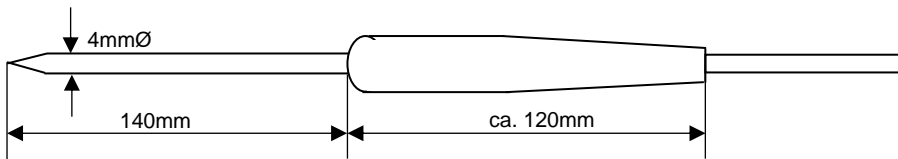

Standard cable length: 2 m, 5 m, 7 m
Special cable: ab 1 m
Please specify standard/special lengths when you order!

Standard needle:
L 140 mm x 4 mm Ø
Length & diameter of the needle vary also. Please specify needle dimensions when you order!

- With PTFE (Teflon) handle + cable
- Water tight design, shielded, 3-wire
- Range of applications: PTFE up to +250°C

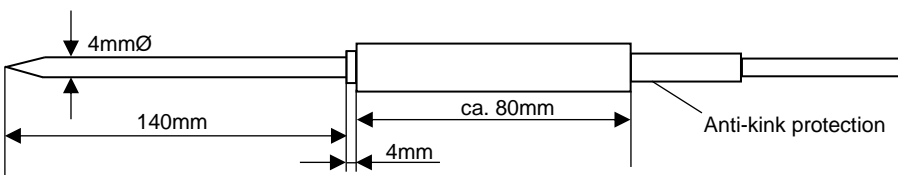

For use in autoclaves, please see our special design:
Watertight and steam resistant,
pressure resistant up to 3 bar.

Don't hesitate to ask us!

