

Process-controller MIC 1100

» for universal cooking and smoking chambers, air conditioned smoke and maturing chambers ...and much more

aditec
CONTROLS for
FOODTECHNOLOGY

» OVERVIEW

The process controller **MIC1100** with touch screen surface of 5" TFT-Display in resistive touch technology, several interfaces, a housing conforming to industrial standard is designed to be used in **universal cooking and smoking chambers, as well as climatic smoke and maturing chambers.**

The standard model of the controller has **2 PT100 temperature inputs** and **2 transposable inputs between PT100 and power 4-20mA/voltage 0-10V** or **thermocouples** (according to standard DIN EN 60584).

PT100 can be connected as two-wire circuit or as three-wire circuit. In three-wire connection a lead compensation is not necessary because it takes place automatically. At 2-wire connection a digital lead compensation can be done.

The standard version of the controller has **18 relay outputs (14 closers, 4 changeover contacts) and 6 digital inputs.**

The controller can be expanded with **8 analogue inputs** or **4 analogue outputs** (transposable between 0..20mA and 0..10V).

For communication there are the following serial interfaces: **LAN/Ethernet and USB Serial Port. Via the USB Serial port you can make a firmware update any time.**

Optionally it is possible to equip the controller with up to 72 relays, 48 digital inputs, **several analogue in- and outputs with additional modules and an additional board ZSC** (on request).

Optionally it is possible to equip the controller up to **72x relays, 48x digital inputs**, various analogue inputs and outputs with additional modules and a ZSC additional board (on request) are also possible.

To be ideally suited to the required task, each control loop can be pre-programmed to be a **two-point controller, a XP-controller or PID.**

The **serial interface enables you to transfer data between the controller MIC 1100 and a PC.** Programming of the controller via a PC is easier because of the **aditec service programme.** The visualization programme **aditec "VisuNet"** offers the possibility of linking the controller to a super-ordinate programme-surveillance and of logging temperature and humidity trend, processes etc. It thereby ensures a comprehensive quality control of the products treated in the units in accordance with **HACCP and IFS (ISO 9000).**

Use the remote maintenance system/telecontrol system **aditec-control** to **not only run and monitor the VisuNet programme but to make changes to the system** from anywhere you happen to be (Internet).

aditec service program – free of charge for our customers!

An easy to use, menu-guided service programme for the basic configuration, which means freely programmable relays, processes, programme steps, as well as user programmes with user-defined labelling of programmes under WIN 8.0 / 8.1 / 10 / Server 2008 / Server 2012 R2 (64 bit).



» FEATURES

- Brilliant 5" TFT-colour display with touch screen surface in resistive touch technology, suitable for industrial application
- Anodized aluminium frame, robust stainless-steel case over, ideally suited for the food industry
- highly resistant foil keyboard
- Number of programs and steps individually adjusted, max.1980 steps total, but max.99 programs and 99 steps selectable
- Easy and systematic configuration setting
- Text display can be switched to a different language
- Most important texts are freely programmable
- Messages as scrolling text display
- Configuration is protected by codes
- 48 programmable process texts
- in- and outputs are freely programmable
- programmable nominal value limits
- all nominal values can be displayed during operation and transiently changed
- option of either relative humidity control or impulse humidifying (interval steaming)
- each control loop can be pre-programmed to be a two-point controller, a XP-controller or PID
- Delta-T-cooking
- F-value-cooking (FC 70-10), FC 121-10 or individually
- Options for shut down (at end of a step) are: Time limit, exceeding the core temperature value or the humidity value (drying), FC-value or cooling (falling below the core temperature value)
- Step time up to 99h : 59min or continuous operation
- Copying, inserting or deleting steps
- Step repetition
- Entering a batch number
- Auto. increasing the batch number (+1) at program start
- User rights for administrators
- Actual value alarms (limit value) for temperature and humidity
- Change-over of the measurement unit °C - °F
- Interfaces: LAN (RJ45), USB Serial Port for PC connection. Via the USB Serial port you can make a firmware update any time.
- Programs that were interrupted through a power cut are resumed at the point where they stopped when power restored
- Freely programmable logic with AND/OR linked and timer

» additional features for climate control:

- Individual nominal value entry for heating and cooling (min./max. temperatures, humidity)
- Gentle motor start-up
- Control of ventilation motor (also infinitely variable) is dependent on temperature and/or humidity (intelligent air-circulation control)
- Automatic shut-down of the cooling function (cooling aggregate) through user-defined upper limit of actual and/or nominal values
- Regulation with outside air / Enthalpy

» TECHNICAL DATA

Stand 06.07.23_06

aditec gmbh ■ Talweg 17 ■ D-74254 Offenau ■ Email: info@aditec.net
Tel.: +49(0)7136 - 96 122-0 ■ Fax: +49(0)7136 - 96 122-20 ■ Web: www.aditec.net

Page 1 of 5

Process-controller MIC 1100

» for universal cooking and smoking chambers, air conditioned
smoke and maturing chambers ...and much more

General data

Material front	Aluminium frame, naturally anodized	
Housing	Robust stainless-steel housing (1.4016)	DIN standard / German Industry Norms
Cooling	Passive (without fan)	
Dimensions	External dimensions: WxHxD: 137 x 234 x 120 mm Depth with terminals: 131 mm	
Mounting dimensions (cut-out):	WxH: 92 x 186 mm	
Weight	1900 g	
Operating temperature	-20 to +65°C	
Storage temperature	-30 to +75°C	
Air humidity	35% - 80% (non-condensing)	
Atmosphere	Non-aggressive gases	
Protection class	IP65 front	
	IP 20 rear side	

Electrical data

Power supply	85~260 V AC / 50 – 60 Hz	optional 18-36 V DC
Residual tittle	5%	
Current consumption	105 mA	at 230 VAC
Power consumption	24 VA	18 relays are controlled
Electrical safety	DIN EN 61010-1 Overvoltage category III	
Electromagnetic compatibility	DIN EN 61326-1 emitted interference, interference immunity	class A for industrial use, for industrial requirements
Battery lifetime (for real-time clock)	8-10 years	
Connection for relay outputs and power supply	Removable lift terminals with screws	wire min. 0,5 – max. 2,5 mm ²
Connection for dig./analogue inputs	removable terminals in Push-in-technology (spring terminals)	min. 0,14 mm ² – max. 1,5 mm ² wire cross-section with 10 mm wire end sleeves

Display

LCD size	5" (12,7 cm screen size)	
Resolution	800 x 480 WVGA	
Aspect ratio	16:9	
Technology	TFT	
Colours	16.7 millions	
Backlight	LED	
Luminance	400 cd/m ²	
Contrast ratio	400:1	
Touch	Resistive	

Process-controller MIC 1100

» for universal cooking and smoking chambers, air conditioned smoke and maturing chambers ...and much more

» TECHNICAL DATA

4 x analogue inputs

Sensor	Type	Additional setting	Measuring range	Meas.unit	Accuracy	Ambient temper.-influence	
E1 + E2	Pt100	-	-100... 500 °C (-148... 932 °F)	°C / °F	≤ 0,1%	≤ 100ppm/°C	Adjustable nominal value limit via code Optional: Max. 8 additional analogue inputs via additional modules MAE 24 (4 inputs per module) → a total of 12 analogue inputs
	TFG80H	-	0...100 % relative humidity	%	≤ 0,1%	≤ 100ppm/°C	
E3 + E4	P1000A	-	Potentiometer: 1000Ω		≤ 0,1%	≤ 100ppm/°C	
	Type K: NiCr-Ni	-	-200...1372 °C (-328...2501 °F)	°C / °F	≤ 0,4%	≤ 100ppm/°C	
	Type J: Fe-CuNi	-	-210...1200 °C (-346...2192 °F)	°C / °F	≤ 0,4%	≤ 100ppm/°C	
	Type T: Cu-CuNi	-	-200... 400 °C (-328... 752 °F)	°C / °F	≤ 0,5%	≤ 100ppm/°C	
	Type B: Pt30Rh-Pt6Rh	-	250...1820 °C (482...3308 °F)	°C / °F	≤ 0,4%	≤ 100ppm/°C	
	Type E: NiCr-CuNi	-	-200...1000 °C (-328...1832 °F)	°C / °F	≤ 0,4%	≤ 100ppm/°C	
	Type N: NiCrSi-NiSi	-	-200...1300 °C (-328...2372 °F)	°C / °F	≤ 0,4%	≤ 100ppm/°C	
	Type R: Pt13Rh-Pt	-	-50...1768 °C (-58...3214 °F)	°C / °F	≤ 0,4%	≤ 100ppm/°C	
	Type S: Pt10Rh-Pt	-	-50...1768 °C (-58...3214 °F)	°C / °F	≤ 0,4%	≤ 100ppm/°C	
	Power	0(4)...20 mA		-9.999...30.000	Variable	≤ 0,3%	
Voltage	0...1 V 0(2)...10 V		-9.999...30.000	Variable	≤ 0,1%	≤ 100ppm/°C	
Sensor HC2	-		Measuring range depending on type of sensor		≤ 0,1%	≤ 100ppm/°C	
E70 - ZAV 21	Vacuum AG4	ADW	0...100 %	Variable	Optional via additional board ZAV21		

2x analogue outputs (optional)

Output areas

A1 and A2

0(2)-10V with $R_{Last} \geq 1000 \Omega$
or 0(4)-20mA with $R_{Last} \leq 500 \Omega$

Optional: 2 additional analogue outputs via additional board ZA2 and max. 4 additional analogue outputs via additional modules MAE24 (2 outputs per module)
→ a total of 6 outputs

6x digital inputs

D1..D6

potential free, usable as counting input to 1 kHz, pulse duration min. 0.5 ms, pause duration min. 0.5 ms

Optional: 10 digital inputs via additional module MD12
→ a total of 48 digital inputs
D7 - D38 pre-reserved for ZD32
D39 - D48 → MD12

18x Relay outputs

R1..R18

Potential free contacts switching capacity (250V AC, 4A), 4 change-over contacts and 14 closers

Optional: max. 46 additional relay outputs via additional module MR6 (6 outputs per module)
→ a total of 72 outputs
R19 - R26 virtually, pre-reserved for ZR8S
R27 - R72 → modules

Serial interfaces

USB

1x USB Host
1x MiniUSB Serial Port

Ethernet/LAN

1x 100Mbit Ethernet/LAN (RJ 45)

CAN (optional)

1x Can Bus (Systembus)

communication with additional boards via additional board ZSC (on request)

Memory

1x MicroSD Card Slot

For MicroSD Card to 32GB

Galvanic isolation

Mains input
85~264VAC/120~370VDC

4 kVAC/1Min

Optional: Power input 18-36VDC -> 2,5kV
Test 1 minute and 1mA max.

Sensor inputs (analogue inputs)

2 kV

Digital inputs

3,75 kV

Analogue outputs

4 kV

Relay outputs

4 kV


Serial interfaces

- LAN 1,5 kV
- USB Host ---
- USB MiniUSB Serial Port ---


Process-controller MIC 1100

» for universal cooking and smoking chambers, air conditioned smoke and maturing chambers ...and much more


» CUT-OUT

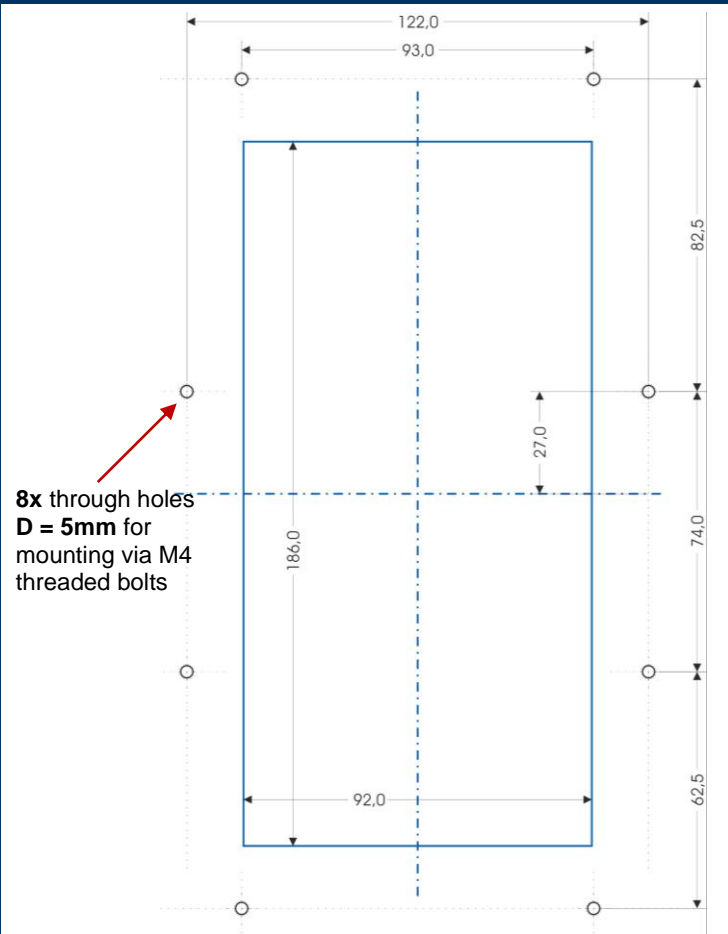

» CONNECTION DIAGRAM

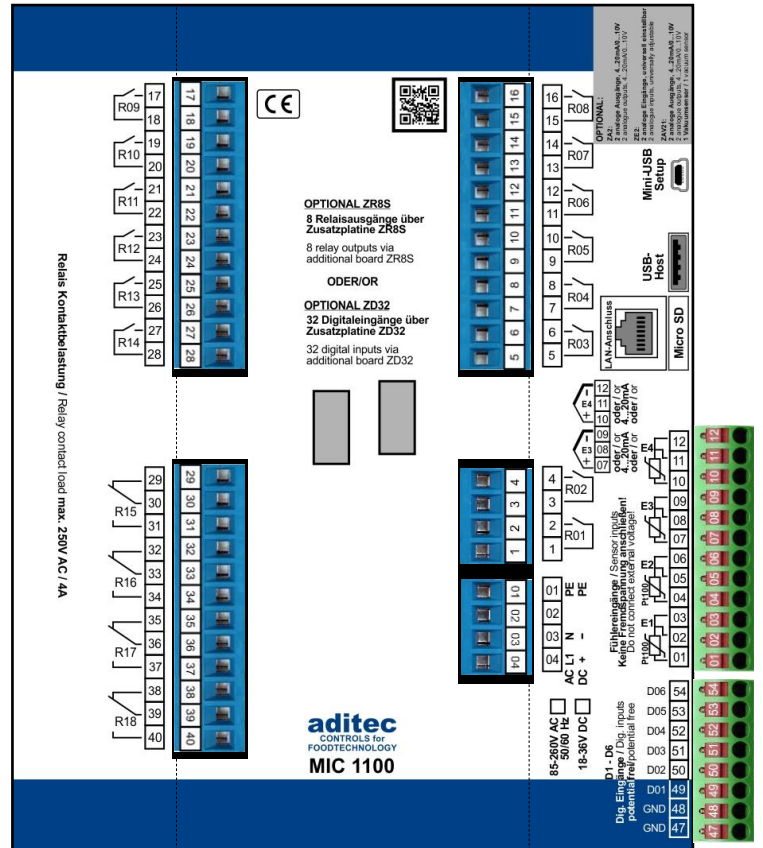

» DIMENSIONS (with terminals)

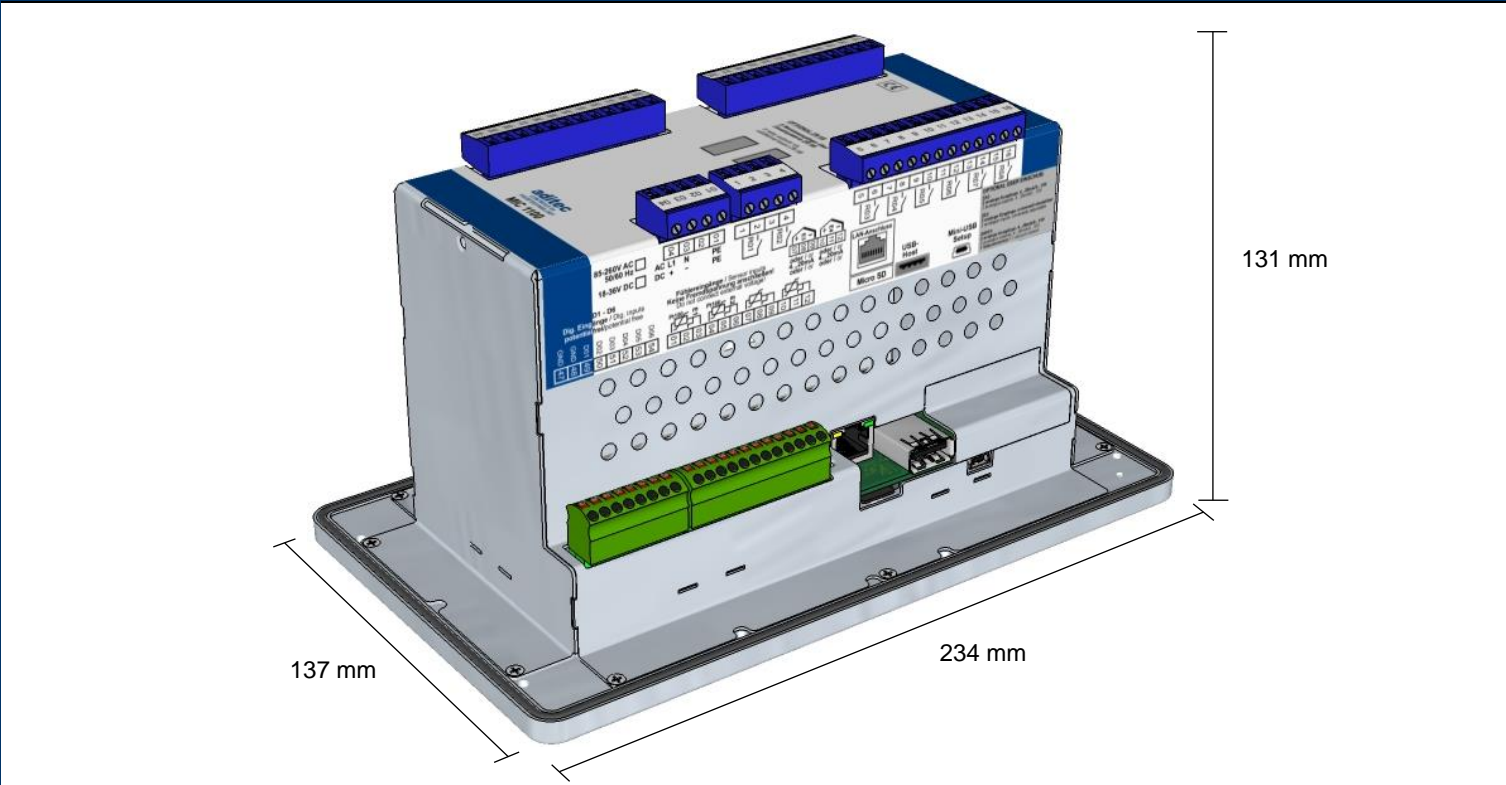


Process-controller MIC 1100

» for universal cooking and smoking chambers, air conditioned smoke and maturing chambers ...and much more

» ADDITIONAL BOARDS / OPTIONS suitable for subsequent installations



- ▶ **ZA2:**
ADDITIONAL BOARD
2 ANALOGUE OUTPUTS,
4...20mA/0...10V

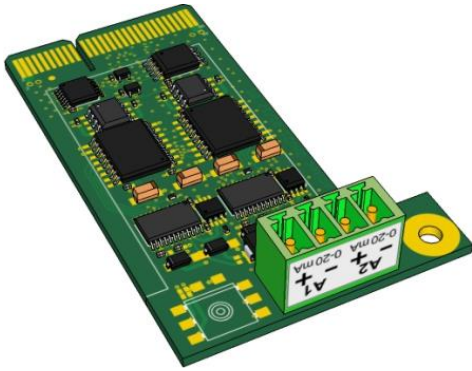

- ▶ **ZAV21:**
ADDITIONAL BOARD
2 ANALOGUE OUTPUTS
+ 1 Vacuum sensor
freely adjustable



- ▶ **ZSC (on request):**
ADDITIONAL BOARD
1x Can Bus (Systembus)

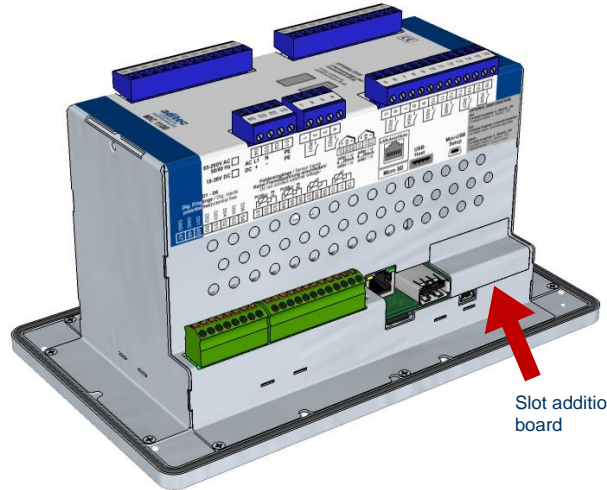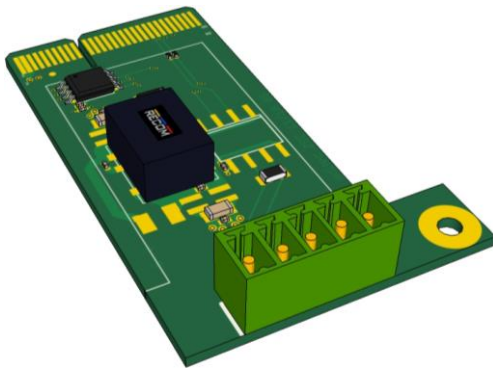

» CAN MODULES / OPTIONS suitable for subsequent expansion via ZSC additional board



▶ MR 6



▶ MAE 24



▶ MD 12

